

Alcatel Premium Reflexes™



Alcatel Premium Reflexes™

Display

Comprises 1 line and several pages of information about your correspondent

Light indicates messages received

To programme your telephone

To call using your personal directory

Secret to isolate you from your correspondent
Interphone so that your telephone answers automatically without you having to off-hook

To access the various message services

To transfer a call to another terminal (multi-line mode)

To end a call or exit from programming

Alphanumeric keypad for calling by name

Protected by a flap, raise the flap to expose the keypad

Audio keys

Loudspeaker (LS)
To share a conversation

To reduce the volume of the LS or handset



To increase the volume of the LS or handset

Hands free to call or answer without off-hooking

Programmable keys and icons

These keys are divided into line keys and function keys. Each key has a corresponding icon.

Line icons


- Incoming call (flashing)
- Call in progress
- Call on hold
- Call on common hold

Function icons

- Function active
- Function requiring action
- Telephone or line busy (supervision)

Certain keys are preprogrammed (these keys differ according to the configuration of your telephone (single-line or multi-line)).

- to switch between two calls (single-line terminal)
- to temporarily store a number
- to consult the list of unanswered ISDN calls or to make an ISDN call
- to cancel an enquiry call (single-line terminal)
- to automatically redial the last number dialled
- to divert calls to another terminal

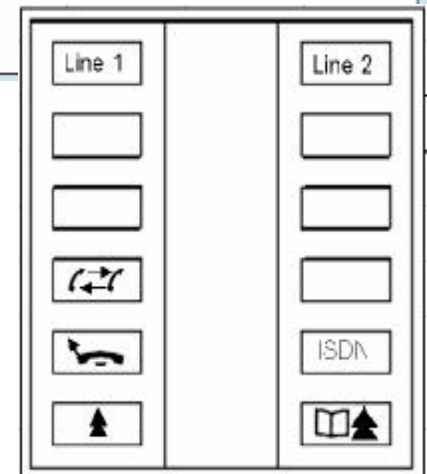

Alcatel Premium Reflexes™

1. Making a call



2. Answering a call



3. Calling using your personal directory



4. Calling your correspondent by name




5. Redialling the last number dialled (Redial)



6. Making a call-back request



In all cases

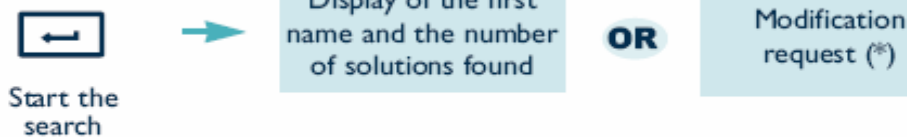

(*) ← used to correct the entry or change the request.

Alcatel Premium Reflexes™

2 1. Calling a second correspondent (enquiry call)



Dial directly

OR



Type in the first letters of the name



The first correspondent is placed on hold

3 Cancelling the enquiry call



Hang up then off-hook



OR



Single-line terminal



You recover the first call

2 2. Answering a second call

During a call, a second correspondent tries to contact you:

Dupond

Name of caller is displayed for 3 seconds



Line keys whose icon is flashing

OR



Programmed key "Consulting call on hold" (single-line terminal)



The first correspondent is placed on hold

2 3. Switching between calls (broker call)

You are in conversation and another call is on hold. To switch from one call to the other:



Line key associated with the icon

OR



Broker call (single-line terminal)



The first correspondent is placed on hold

2 5. Conversing with two correspondents (3-way conference)

During a conversation, another call is on hold:



Programmed "Conference" key

OR



"Conference" function code

Alcatel Premium Reflexes™


3 1. Programming your personal code

The code of your terminal is 0000 by default.
To select or change your personal code:



3 2. Programming your personal directory


Your personal directory contains up to 12 numbers (0 to 9, * and #).

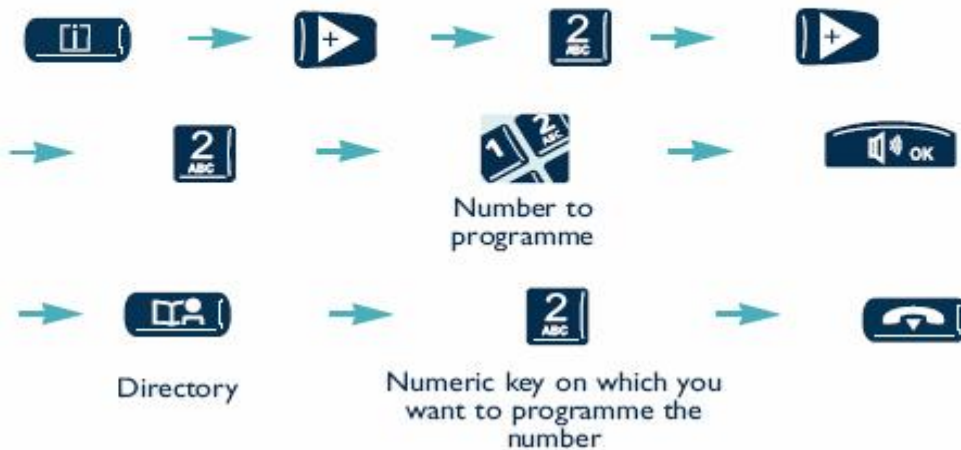

Personal directory numbers		
0	4	8
1	5	9
2	6	*
3	7	#

3 3. Programming a function on an unassigned key

The list of programmable functions is given in your user manual.

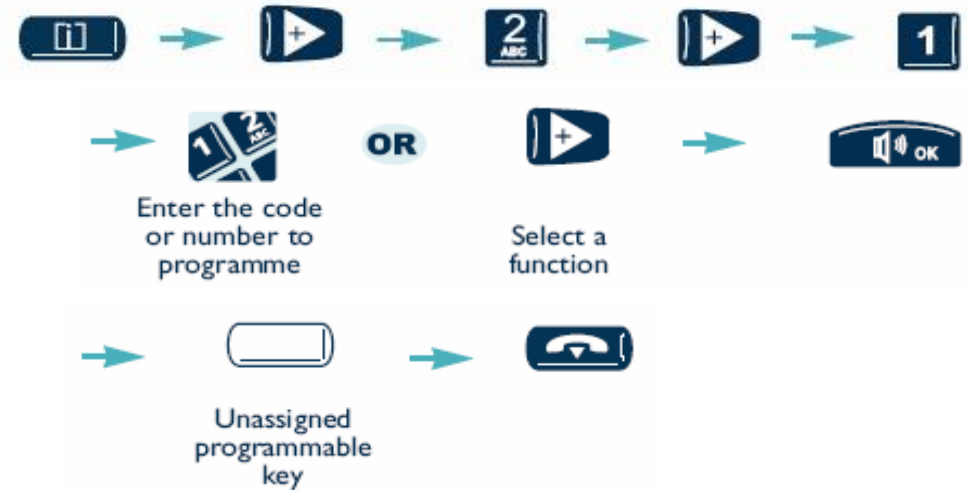


3 4. Selecting your ringer tune

Terminal idle:



Alcatel Premium Reflexes™

4 1. Forwarding your calls to another number (immediate forward)

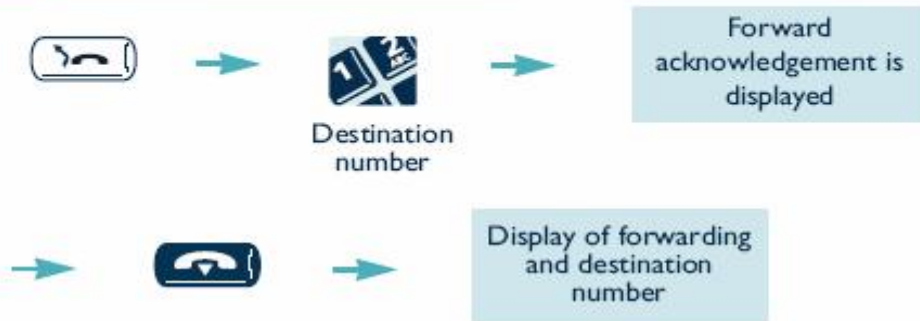

4 2. Forwarding your calls to the voice mail




4 3. Cancelling forwarding on your return




4 4. Consulting your messages on your return

The light and corresponding icon  indicate messages received.

• Call-back requests

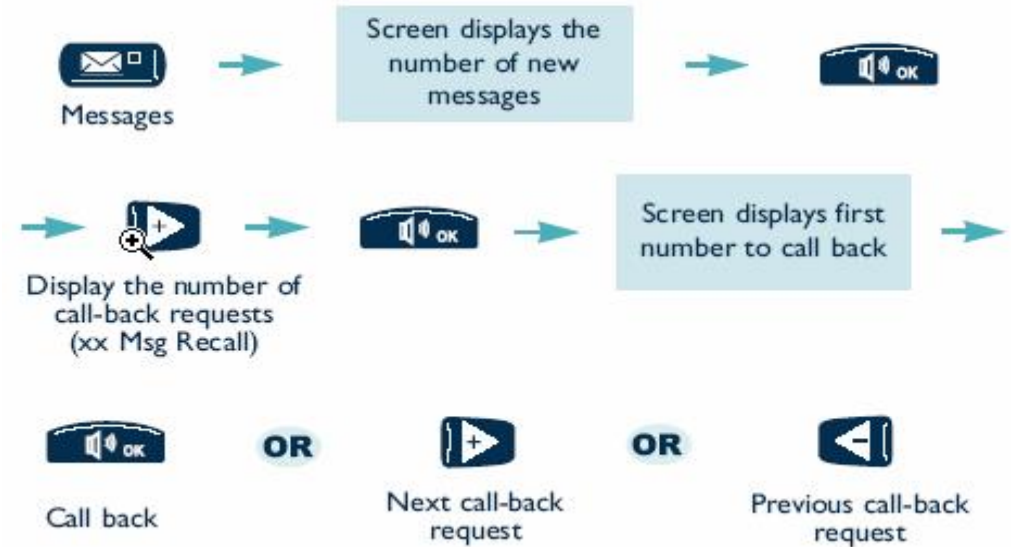

• Voice messages

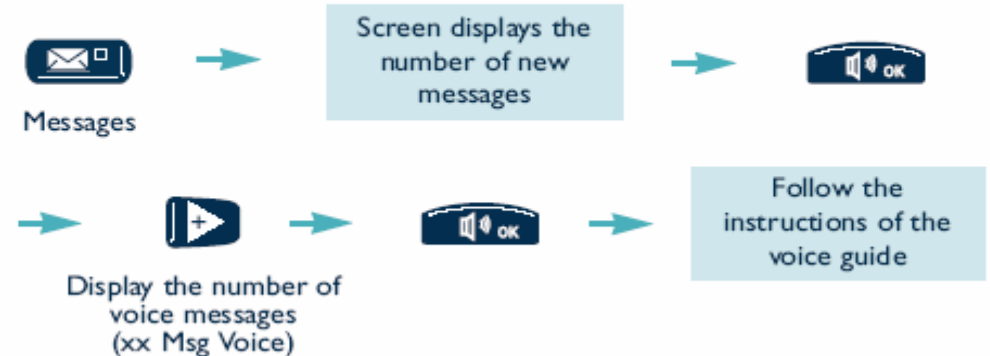

Alcatel Premium Reflexes™

Telephone Feature	Code	How to activate
Transfer call	R	R Extension Hang up
Immediate Forward	#60	#60 Extension Hang up
Cancel Forwarding	#64	#64 Hang up
Automatic Call Back	5	Call Extension (busy) press 5 Hang up
Cancel automatic Call Back	#67	Press #67 Hang up
Busy Camp On	6	Call Extension (busy) press 6 Hear Music
Password Modification	#59	#59 Old Password(****) New Password (****)
Pad Lock	#80	Press #80 Hang up
Cancel Pad Lock	#80	Press #80 Password Hank up
Waiting Call Consultation	#74	A Conversation B Press R Press #74 Conversation
Three Party Conference	3	A Call Extension B Press R Call Extension C Press R Press 3 Conversion 3 Party
Wake-up	#81	Press #81 HH:mm:ss Hang up
Cancel wake-up	#82	Press #82 Hang up